

YS12RPC2500-1R2-1R4-7

12-Way Radial Power Combiner, 2.5 kW, 1.2-1.4 GHz, 7/16 DIN

Key Features


- High-power handling capability
- Low combining loss
- Efficient multi-way power combining
- Compact radial design
- Custom high-power configurations

Applications

- High-power RF amplifiers
- Phased array radar
- Electronic warfare systems
- RF energy and plasma systems
- Broadcast transmitters

Electrical Specifications		
1	Frequency Range	1.2-1.4 GHz
2	Insertion Loss	≤ 0.5 dB(avg.)
3	Common Port VSWR	$\leq 1.40:1$
4	Amplitude Balance	$\leq \pm 0.3$ dB
5	Phase Balance	$\leq \pm 5^\circ$
6	Power Handling	2.5 kW(CW)
7	Impedance	50 Ω
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	7/16 DIN Female, N-Type Femlae
2	Surface Finishing	Clear Conductive Oxide Finish
3	Dimensions ¹	$\Phi 390 \times 50$ mm / [$\Phi 15.35 \times 1.97$ in]

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.3 mm)

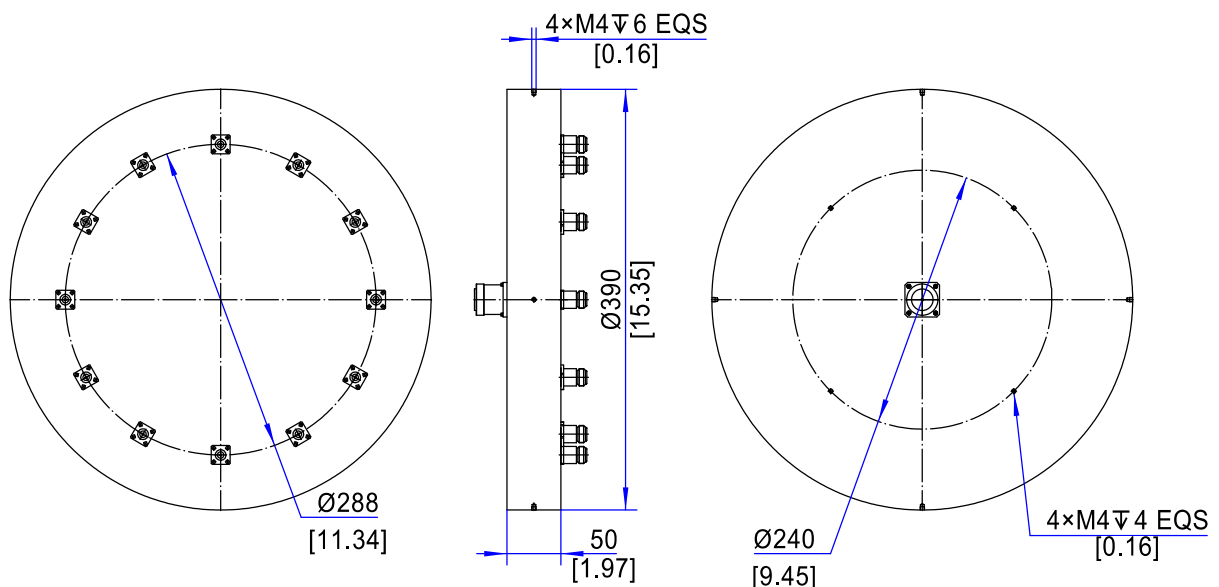

Note 1: Excluding Connectors