

YS180H100-1R7-2R6-16-S

180° Hybrid Coupler, 100 W, 1.7-2.6 GHz, 16 dB Isolation, SMA

Key Features


- Equal power split
- 180° phase difference
- Sum & difference ports
- High port isolation
- Low insertion loss

Applications

- Monopulse radar
- Balanced amplifiers
- Balanced mixers
- Antenna feed networks
- RF power combining

Electrical Specifications		
1	Frequency Range	1.7-2.6 GHz
2	Insertion Loss	≤0.8 dB
3	VSWR	≤1.30:1
4	Isolation	≥16 dB
5	Amplitude Balance	≤±0.4 dB
6	Phase Balance	≤±4°
7	Power Handling	100 W(CW)
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	SMA Female
2	Surface Finishing	Natural Conductive Oxidation
3	Dimensions ¹	40×40×13 mm / [1.57×1.57×0.51 in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.2 mm)

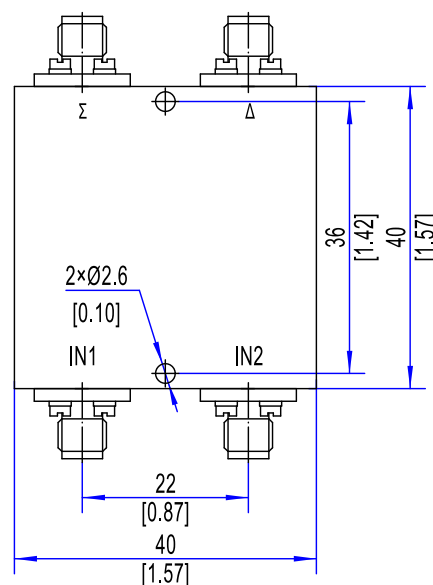

Note 1: Excluding Connector size