

YS2CI100-R3-1R45-N

0.3-1.45 GHz Dual-Junction Coaxial Isolator, 100 W, 50 dB Isolation

Key Features

- High isolation
- High reverse power handling
- Low insertion loss
- Excellent VSWR
- Compact, customizable design


Applications

- Radar and EW systems
- Satellite & aerospace communications
- Defense and high-power transmitters
- RF test equipment
- Telecom infrastructure


Electrical Specifications

Frequency Range (GHz)	Insertion Loss (dB Max)	Isolation (dB Min)	VSWR	CW Power (w)	Reverse Power (w)
0.3-0.32	1.2	40	1.25	100	20/100
0.3-0.35	1.6	36	1.35	100	20/100
0.31-0.34	1.0	40	1.25	100	20/100
0.32-0.34	0.9	40	1.25	100	20/100
0.35-0.37	0.8	40	1.25	100	20/100
0.35-0.4	1.0	38	1.25	100	20/100
0.361-0.366	0.6	46	1.20	100	20/100
0.37-0.42	1.0	38	1.25	100	20/100
0.38-0.41	0.8	40	1.25	100	20/100
0.38-0.46	1.0	36	1.30	100	20/100
0.39-0.41	0.6	46	1.20	100	20/100
0.4-0.42	0.6	46	1.20	100	20/100
0.4-0.44	0.8	40	1.25	100	20/100
0.4-0.45	0.8	40	1.25	100	20/100
0.4-0.47	0.8	40	1.25	100	20/100
0.4-0.5	1.0	38	1.25	100	20/100
0.41-0.46	0.8	40	1.25	100	20/100
0.42-0.43	0.6	50	1.15	100	20/100
0.42-0.45	0.6	46	1.20	100	20/100
0.42-0.48	0.8	40	1.25	100	20/100
0.43-0.44	0.6	46	1.20	100	20/100
0.43-0.47	0.8	40	1.25	100	20/100
0.44-0.47	0.6	46	1.20	100	20/100
0.45-0.456	0.5	50	1.15	100	20/100
0.45-0.5	0.8	40	1.25	100	20/100
0.45-0.52	0.8	40	1.25	100	20/100
0.45-0.55	0.8	40	1.25	100	20/100
0.455-0.465	0.5	50	1.15	100	20/100
0.459-0.486	0.6	46	1.20	100	20/100
0.47-0.49	0.6	46	1.20	100	20/100

0.47-0.53	0.8	40	1.20	100	20/100
0.47-0.57	0.8	40	1.25	100	20/100
0.47-0.61	1.0	36	1.30	100	20/100
0.475-0.525	0.6	46	1.20	100	20/100
0.495-0.516	0.6	46	1.20	100	20/100
0.5-0.6	0.8	40	1.20	100	20/100
0.5-0.7	1.4	34	1.35	100	20/100
0.57-0.67	0.6	46	1.20	100	20/100
0.58-0.72	0.8	38	1.25	100	20/100
0.6-0.7	0.8	40	1.25	100	20/100
0.6-0.8	0.6	46	1.30	100	20/100
0.67-0.77	0.8	40	1.20	100	20/100
0.69-0.86	0.6	46	1.20	100	20/100
0.7-0.8	0.5	50	1.20	100	20/100
0.7-0.862	0.8	40	1.25	100	20/100
0.7-0.9	0.8	40	1.25	100	20/100
0.703-0.862	0.8	40	1.25	100	20/100
0.75-0.95	0.5	50	1.25	100	20/100
0.77-0.86	0.6	46	1.20	100	20/100
0.8-1.0	0.8	40	1.25	100	20/100
0.854-0.921	0.6	46	1.20	100	20/100
0.86-0.872	0.5	50	1.15	100	20/100
0.862-0.96	0.6	46	1.20	100	20/100
0.9-0.93	0.5	50	1.15	100	20/100
0.9-1.0	0.6	46	1.20	100	20/100
0.9-1.1	0.8	40	1.25	100	20/100
0.9-1.3	1.0	38	1.25	100	20/100
0.95-1.0	0.6	46	1.20	100	20/100
0.95-1.26	0.8	40	1.25	100	20/100
0.95-1.28	1.0	40	1.25	100	20/100
0.95-1.45	1.2	34	1.35	100	20/100
0.96-1.16	0.8	40	1.25	100	20/100
0.96-1.215	0.8	40	1.25	100	20/100
0.96-1.26	0.8	40	1.25	100	20/100
Impedance	50 Ω				
Environmental Specifications					
Operating Temperature	-30°C to +70°C, -40°C to +85°C Please consult with a sales engineer to verify all specifications within the operating temperature range of -40°C to +85°C.				
Storage Temperature	-50°C to +90°C				
Mechanical Specifications					
Connectors	SMA Female, N-Type Female				
Dimension ¹	96×62×26 mm / [3.78×2.44×1.02 in]				

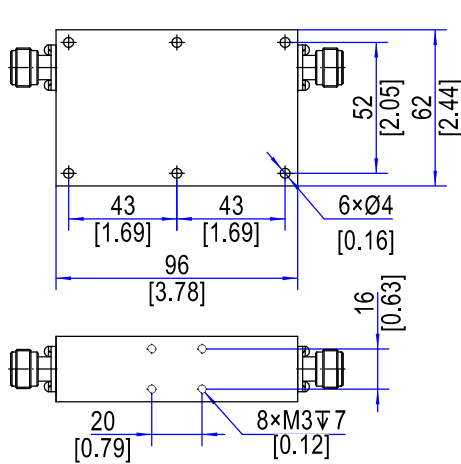Outline Drawing (Units: mm/[inch], Tolerance: ± 0.3 mm)


Outline A
N-Type Connector

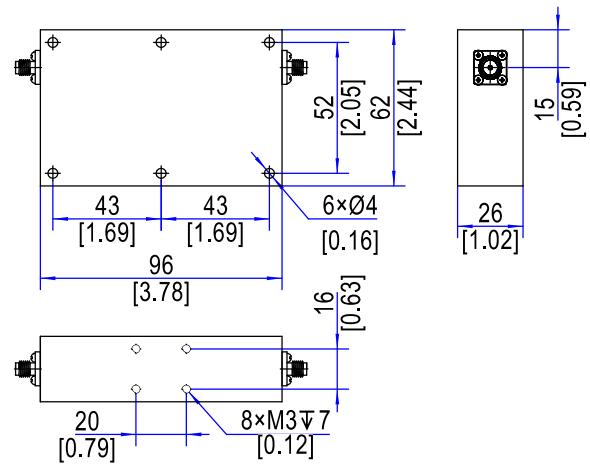

Outline B
SMA Connector

Example: 0.3-0.32 GHz, 100 W, N-Type Connector, Reflected Power 100 W.

Model: YS2CI100-R3-R32-N-100

Note 1: Excluding connector size.