

YS2PC200-R35-R7-S

2-Way Power Combiner, 200 W, 0.35-0.7 GHz, SMA

Key Features


- Low insertion loss
- High port isolation
- Wide operating bandwidth
- Excellent amplitude and phase balance
- Custom frequency and power options

Applications

- RF power amplifier combining
- Wireless infrastructure
- SATCOM systems
- Radar transmitters
- RF test systems

Electrical Specifications		
1	Frequency Range	0.35-0.7 GHz
2	Insertion Loss	≤ 0.5 dB
3	VSWR	$\leq 1.40:1$
4	Isolation	≥ 14 dB
5	Amplitude Balance	$\leq \pm 0.2$ dB
6	Phase Balance	$\leq \pm 5^\circ$
7	Power Handling	200 W(CW), ≥ 500 (PK), 20 mS, 40% Duty Cycle
8	Impedance	50 Ω
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	SMA Female
2	Surface Finishing	Silver Plating
3	Dimensions ¹	62×82.5×14 mm / [2.44×3.25×0.55 in]

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.2 mm)

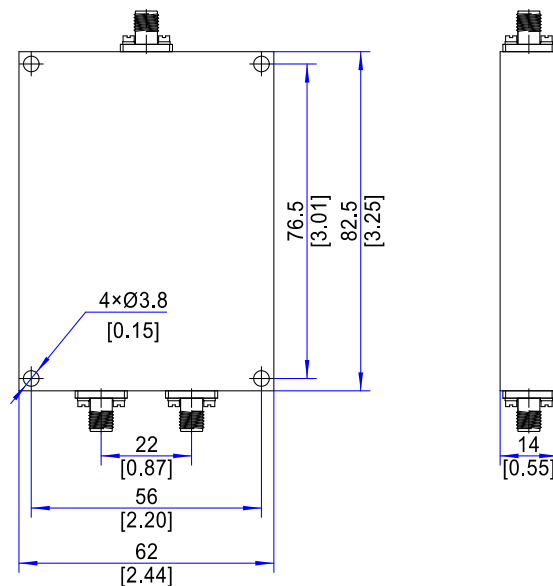

Note 1: Excluding Connectors