

## YS2WPD250-R2-1-S

2-Way Wilkinson Power Divider, 250 W, 0.2-1 GHz, SMA

### Key Features


- 0.2-1 GHz Wideband Coverage
- Low Insertion Loss
- Excellent Amplitude & Phase Balance
- High Isolation ( $\geq 14$  dB)
- 250 W Power Handling

### Applications

- RF & Microwave Systems
- Test & Measurement
- Radar & EW Systems
- Communication Networks
- Signal Distribution

Electrical Specifications		
1	Frequency Range	0.2-1 GHz
2	Insertion Loss	$\leq 0.7$ dB
3	Input Port VSWR	$\leq 1.45:1$
4	Output Port VSWR	$\leq 1.45:1$
5	Isolation	$\geq 14$ dB
6	Amplitude Balance	$\leq \pm 0.3$ dB
7	Phase Balance	$\leq \pm 3^\circ$
8	Power Handling	250 W
9	Impedance	50 $\Omega$
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	SMA Female
2	Surface Finishing	Silver Plating
3	Dimensions <sup>1</sup>	88×90×15 mm / [3.46×3.54×0.59 in]

**Outline Drawing** (Units: mm/[inch], Tolerance:  $\pm 0.3$  mm)

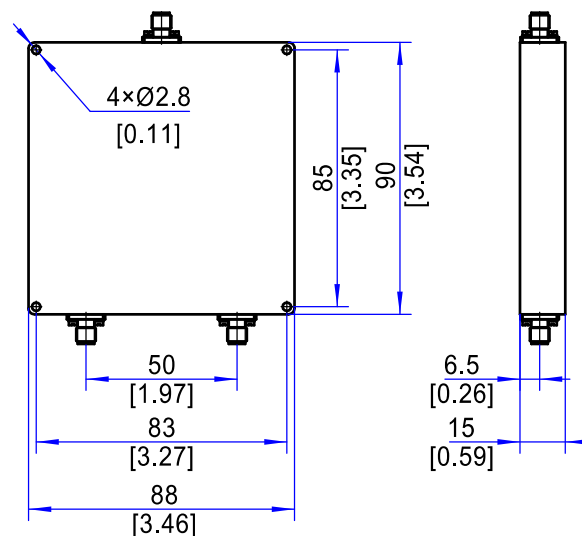

Note 1: Excluding Connectors