

YS2WPD30-R5-1-S

2-Way Wilkinson Power Divider, 30 W, 0.5-1 GHz, SMA

Key Features


- 0.5-1 GHz Wideband Coverage
- Low Insertion Loss
- Excellent Amplitude & Phase Balance
- High Isolation (≥ 22 dB)
- 30 W Power Handling

Applications

- RF & Microwave Systems
- Test & Measurement
- Radar & EW Systems
- Communication Networks
- Signal Distribution

Electrical Specifications		
1	Frequency Range	0.5-1 GHz
2	Insertion Loss	≤ 0.3 dB
3	Input Port VSWR	$\leq 1.2:1$
4	Output Port VSWR	$\leq 1.15:1$
5	Isolation	≥ 22 dB
6	Amplitude Balance	$\leq \pm 0.2$ dB
7	Phase Balance	$\leq \pm 2^\circ$
8	Power Handling	Forward Power: 30 W; Reverse Power: 2 W
9	Impedance	50 Ω
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	SMA Female
2	Surface Finishing	Putty filling and gray-white paint spraying
3	Dimensions ¹	34×39×10 mm / [1.34×1.54×0.39 in]

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.3 mm)

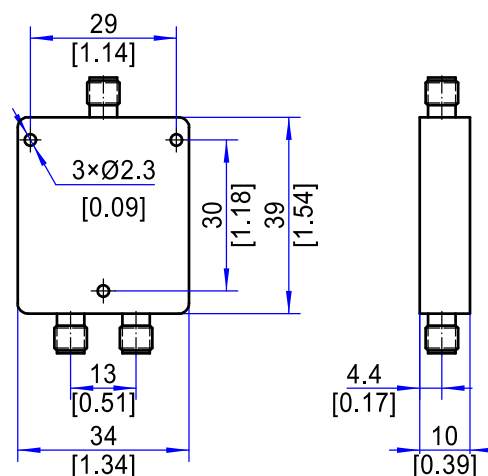

Note 1: Excluding Connectors