

YS4HPC300-R4-3-N

4-Way Hybrid Power Combiner, 300 W, 0.4-3 GHz, N-Type

Key Features


- Low insertion loss
- High port isolation
- Wide operating bandwidth
- Excellent amplitude and phase balance
- Custom frequency and power options

Applications

- RF power amplifier combining
- Wireless infrastructure
- SATCOM systems
- Radar transmitters
- RF test systems

Electrical Specifications		
1	Frequency Range	0.4-3 GHz
2	Insertion Loss	≤ 1.3 dB (avg.)
3	Output Port VSWR	≤1.50:1
4	Isolation	≥12 dB
5	Amplitude Balance	≤±1.5 dB
6	Phase Balance	≤±6°
7	Power Handling	300 W(CW)
8	Impedance	50 Ω
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	N-Type Female, SMA Female
2	Surface Finishing	Natural Conductive Oxidation
3	Dimensions ¹	300×50×20 mm / [11.81×1.97×0.79 in]

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.2 mm)

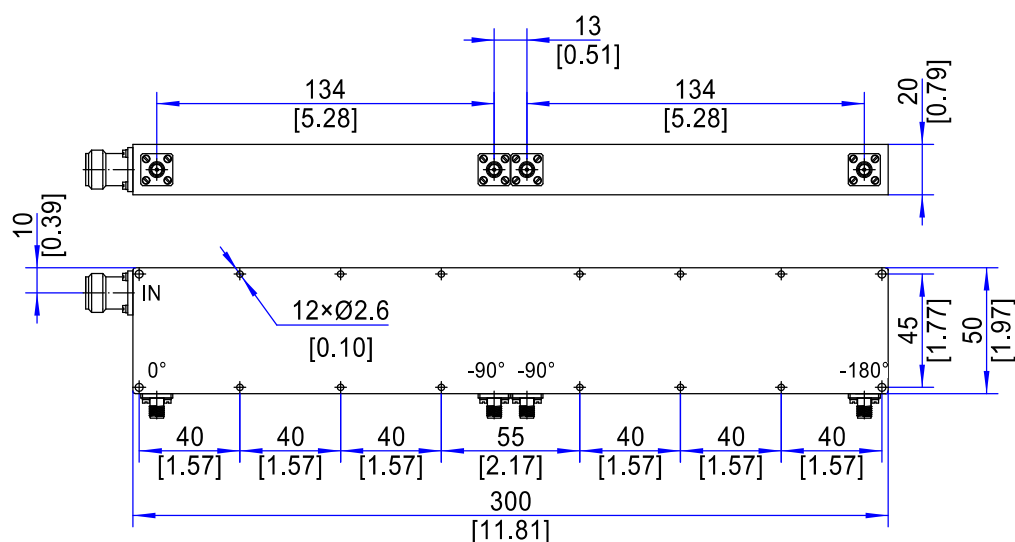

Note 1: Excluding Connectors