

YS4PC500-R698-R96-N

4-Way Power Combiner, 500 W, 0.698-0.96 GHz, N-Type

Key Features


- Low insertion loss
- High port isolation
- Wide operating bandwidth
- Excellent amplitude and phase balance
- Custom frequency and power options

Applications

- RF power amplifier combining
- Wireless infrastructure
- SATCOM systems
- Radar transmitters
- RF test systems

Electrical Specifications		
1	Frequency Range	0.698-0.96 GHz
2	Insertion Loss	≤ 0.4 dB
3	VSWR	$\leq 1.40:1$
4	Isolation	≥ 15 dB
5	Amplitude Balance	$\leq \pm 0.2$ dB
6	Phase Balance	$\leq \pm 3^\circ$
7	Power Handling	500 W(CW)
8	Impedance	50 Ω
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	N-Type Female, SMA Female
2	Surface Finishing	Natural Conductive Oxidation
3	Dimensions ¹	133.3×74.3×30 mm / [5.25×2.93×1.18 in]

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.2 mm)

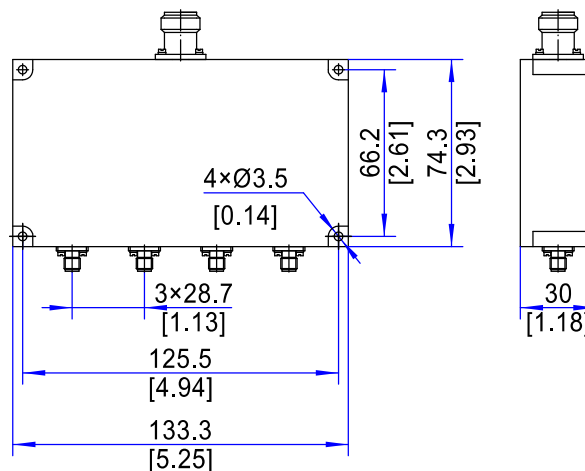

Note 1: Excluding Connectors