

# YS4WPD150-20M-1-S

4-Way Wilkinson Power Divider, 150 W, 0.02-1 GHz, SMA

## Key Features


- 0.02-1 GHz Wideband Coverage
- Low Insertion Loss
- Excellent Amplitude & Phase Balance
- High Isolation ( $\geq 17$  dB)
- 150 W Power Handling

## Applications

- RF & Microwave Systems
- Test & Measurement
- Radar & EW Systems
- Communication Networks
- Signal Distribution

Electrical Specifications		
1	Frequency Range	0.02-1 GHz
2	Insertion Loss	$\leq 0.9$ dB
3	Input Port VSWR	$\leq 1.35:1$
4	Output Port VSWR	$\leq 1.5:1$
5	Isolation	$\geq 17$ dB
6	Amplitude Balance	$\leq \pm 0.2$ dB
7	Phase Balance	$\leq \pm 5^\circ$
8	Power Handling	150 W
9	Impedance	50 $\Omega$
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	SMA Female
2	Surface Finishing	Natural Conductive Oxidation
3	Dimensions <sup>1</sup>	80×74×18 mm / [3.15×2.91×0.71 in]

**Outline Drawing** (Units: mm/[inch], Tolerance:  $\pm 0.3$  mm)

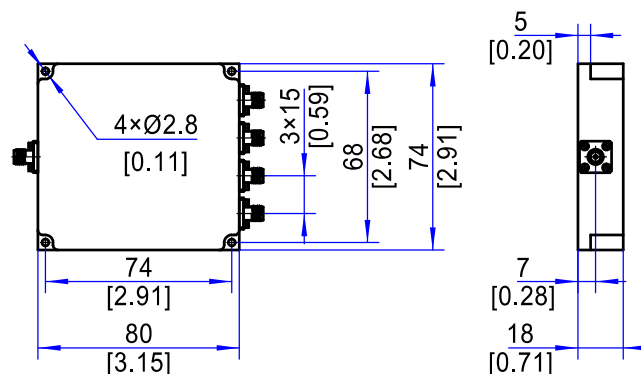

Note 1: Excluding Connectors