

YS4WPD150-R8-2-S

4-Way Wilkinson Power Divider, 150 W, 0.8-2 GHz, SMA

Key Features


- 0.8-2 GHz Wideband Coverage
- Low Insertion Loss
- Excellent Amplitude & Phase Balance
- High Isolation (≥ 16 dB)
- 150 W Power Handling

Applications

- RF & Microwave Systems
- Test & Measurement
- Radar & EW Systems
- Communication Networks
- Signal Distribution

Electrical Specifications		
1	Frequency Range	0.8-2 GHz
2	Insertion Loss	≤ 0.6 dB
3	Input Port VSWR	$\leq 1.5:1$
4	Isolation	≥ 16 dB
5	Amplitude Balance	$\leq \pm 0.3$ dB
6	Phase Balance	$\leq \pm 5^\circ$
7	Power Handling	Forward Power: 150 W; Reverse Power: ≤ 20 W
8	Impedance	50 Ω
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	SMA Female
2	Surface Finishing	Cavity: Silver plated Cover: Natural conductive oxidation
3	Dimensions ¹	100×80×12 mm / [3.94×3.15×0.47 in]

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.3 mm)

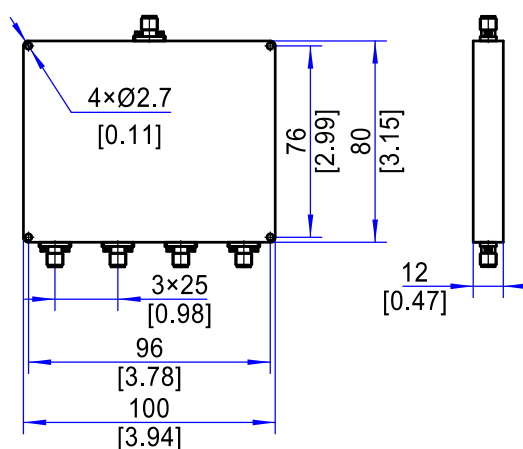

Note 1: Excluding Connectors