

YS6WPD120-1R8-2R2-S

6-Way Wilkinson Power Divider, 120 W, 1.8-2.2 GHz, SMA

Key Features


- 1.8-2.2 GHz Wideband Coverage
- Low Insertion Loss
- Excellent Amplitude & Phase Balance
- High Isolation (≥ 15 dB)
- 120 W Power Handling

Applications

- RF & Microwave Systems
- Test & Measurement
- Radar & EW Systems
- Communication Networks
- Signal Distribution

Electrical Specifications		
1	Frequency Range	1.8-2.2 GHz
2	Insertion Loss	≤ 0.6 dB
3	Input Port VSWR	$\leq 1.6:1$
4	Output Port VSWR	$\leq 1.5:1$
5	Isolation	≥ 15 dB
6	Amplitude Balance	$\leq \pm 0.3$ dB
7	Phase Balance	$\leq \pm 5^\circ$
8	Power Handling	120 W
9	Impedance	50 Ω
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	SMA Female
2	Surface Finishing	Cavity: Silver plated Cover: Natural conductive oxidation
3	Dimensions ¹	105×79×12 mm / [4.13×3.11×0.47 in]

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.3 mm)

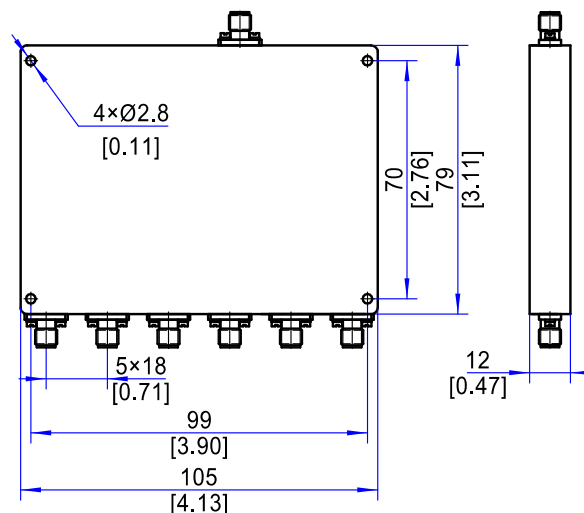

Note 1: Excluding Connectors