

YS8WPD200-1R2-1R4-S

8-Way Wilkinson Power Divider, 200 W, 1.2-1.4 GHz, SMA

Key Features


- 1.2-1.4 GHz Wideband Coverage
- Low Insertion Loss
- Excellent Amplitude & Phase Balance
- High Isolation (≥ 16 dB)
- 200 W Power Handling

Applications

- RF & Microwave Systems
- Test & Measurement
- Radar & EW Systems
- Communication Networks
- Signal Distribution

Electrical Specifications		
1	Frequency Range	1.2-1.4 GHz
2	Insertion Loss	≤ 0.9 dB
3	Input Port VSWR	$\leq 1.5:1$
4	Isolation	≥ 16 dB
5	Amplitude Balance	$\leq \pm 0.3$ dB
6	Phase Balance	$\leq \pm 5^\circ$
7	Power Handling	Forward Power: 200 W; Reverse Power: 50 W
8	Impedance	50 Ω
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	SMA Female
2	Surface Finishing	Silver Plating
3	Dimensions ¹	200×120×12 mm / [7.87×4.72×0.47 in]

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.3 mm)

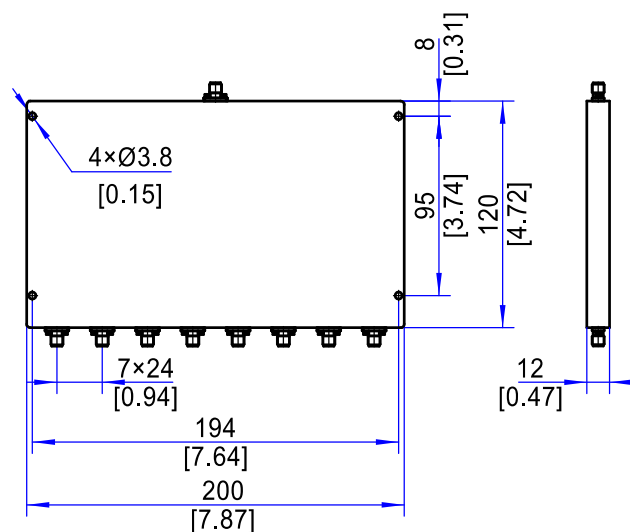

Note 1: Excluding Connectors