

YSCLL-360G

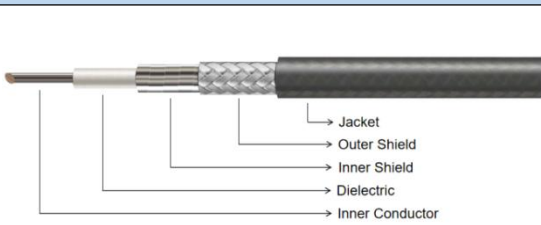
18 GHz, ϕ 3.60 mm Cost-Effective Low-Loss RF Cable Assembly

Key Features

- Low VSWR
- Low Insertion Loss
- Cost-Effective Solution
- Stable RF Performance
- Flexible Installation

Applications

- Cabinet Interconnections
- Communication Base Stations
- RF Distribution Systems
- Wireless Communication
- General RF Applications

Cable Construction								
			Cable Type	Dia.(mm)	Material			
			Inner Conductor	ϕ 0.91	Silver plated Copper			
			Dielectric	ϕ 2.65	Low Density PTFE			
			Inner Shield	ϕ 2.78	Bonded Aluminum Foil			
			Outer Shield	ϕ 3.15	Silver-Plated Copper Wire			
			Jacket	ϕ 3.60	FEP			
Electrical Specifications				Mechanical Specifications				
Operating Freq.	18 GHz			Static Bending Radius	18 mm			
Cut-off Freq.	40 GHz			Dynamic Bending Radius	36 mm			
Impedance	50 Ω			Weight	29 g/m			
Velocity of Propagation	76%			Environmental Specifications				
Shielding Effectiveness	>70 dB			Operating Temperature	-55 to +125°C			
Dielectric Withstanding Voltage	1500 VDC							
Attenuation (dB/100 M, Typical at +25°C) & Power Handling (W, Typical at +40°C)								
Freq.(GHz)	1	2	3	6	8	10	12.4	18
Attenuation	38.7	55.0	67.7	96.6	112.5	126.4	141.5	172.3
Avg. Power	533	374	304	213	183	163	146	120
Typical Cable Attenuation Calculation Formula: $K1*\sqrt{F}(\text{MHz}) + K2*F(\text{MHz})$ $K1=1.204032, K2=0.000600$								
Connectors Options								
Connectors	Freq.(Max)	VSWR (Max)		Connectors	Freq.(Max)	VSWR (Max)		
SMA (S)	27 GHz	1.25:1		N(N)	18 GHz	1.25:1		

Cable Assemblies Naming Rule:

PN: Cable-Length(M)-Connector 1-Connector 2

Eg.: YSCLL-360G-1M-SM-SF means YSCLL-360G cable, L=1M, SMA(M)-SMA(F).

Add "R" for Right-Angle Connector, Add "H" for Bulkhead Connector (e.g., SMR, SFH).