

# YSHPLL-460B

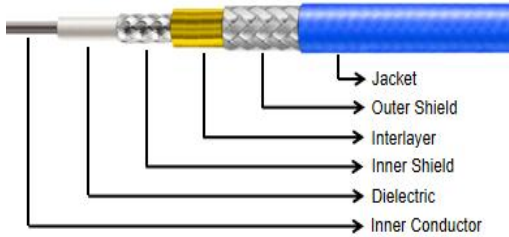
18 GHz,  $\phi$ 4.60 mm High-Power Low-Loss RF Cable Assembly

## Key Features

- High Power Capability
- Ultra-Low Loss
- Excellent Power Efficiency
- Stable RF Performance
- Robust Construction

## Applications

- Radar Systems
- Electronic Warfare
- RF Transmission Systems
- High-Power Test Platforms
- Aerospace & Defense

| Cable Construction  |             |            |     |                 |                              |                            |            |       |       |
|---|-------------|------------|-----|-----------------|------------------------------|----------------------------|------------|-------|-------|
|                        |             |            |     | Cable Type      | Dia.(mm)                     | Material                   |            |       |       |
|   |             |            |     | Inner Conductor | $\phi$ 1.02                  | Silver plated Copper       |            |       |       |
|   |             |            |     | Dielectric      | $\phi$ 3.07                  | Low Density PTFE           |            |       |       |
|   |             |            |     | Inner Shield    | $\phi$ 3.27                  | Silver Plated Copper Strip |            |       |       |
|   |             |            |     | Interlayer      | $\phi$ 3.43                  | High-Temp Aluminum Foil    |            |       |       |
|   |             |            |     | Outer Shield    | $\phi$ 4.00                  | Silver Plated Copper Braid |            |       |       |
|   |             |            |     | Jacket          | $\phi$ 4.60                  | FEP                        |            |       |       |
| Electrical Specifications   |             |            |     |                 | Mechanical Specifications    |                            |            |       |       |
| Operating Freq.   | 18 GHz      |            |     |                 | Static Bending Radius        | 23 mm                      |            |       |       |
| Cut-off Freq.   | 35 GHz      |            |     |                 | Dynamic Bending Radius       | 46 mm                      |            |       |       |
| Impedance   | 50 $\Omega$ |            |     |                 | Weight                       | 53 g/m                     |            |       |       |
| Velocity of Propagation   | 76%         |            |     |                 | Environmental Specifications |                            |            |       |       |
| Shielding Effectiveness   | >90 dB      |            |     |                 | Operating Temperature        | -55 to +200°C              |            |       |       |
| Dielectric Withstanding Voltage   | 1500 VDC    |            |     |                 |                              |                            |            |       |       |
| Passive Intermodulation (PIM)   | <-155 dBc   |            |     |                 |                              |                            |            |       |       |
| Attenuation (dB/100 M, Typical at +25°C) & Power Handling (W, Typical at +40°C)                         |             |            |     |                 |                              |                            |            |       |       |
| Freq.(GHz)  | 1           | 2          | 3   | 6               | 8                            | 10                         | 12.4       | 16    | 18    |
| Attenuation   | 35.4        | 50.4       | 62  | 88.8            | 103.2                        | 116.0                      | 129.9      | 148.7 | 158.3 |
| Avg. Power  | 569         | 400        | 324 | 227             | 195                          | 174                        | 155        | 135   | 127   |
| Typical Cable Attenuation Calculation Formula: $K1 \cdot \sqrt{F(\text{MHz})} + K2 \cdot F(\text{MHz})$ |             |            |     |                 |                              |                            |            |       |       |
| K1=1.099485, K2=0.000602  |             |            |     |                 |                              |                            |            |       |       |
| Connectors Options  |             |            |     |                 |                              |                            |            |       |       |
| Connectors  | Freq.(Max)  | VSWR (Max) |     |                 | Connectors                   | Freq.(Max)                 | VSWR (Max) |       |       |
| SMA (S)   | 27 GHz      | 1.25:1     |     |                 |                              |                            |            |       |       |
| N(N)  | 18 GHz      | 1.25:1     |     |                 |                              |                            |            |       |       |

## Cable Assemblies Naming Rule:

PN: Cable-Length(M)-Connector 1-Connector 2

Eg.: YSHPLL-460B-1M-SM-SF means YSHPLL-460B cable, L=1M, SMA(M)-SMA(F).

Add "R" for Right-Angle Connector, Add "H" for Bulkhead Connector (e.g., SMR, SFH).