

YSLA30-R1-70-6A

Low Noise Amplifier | LNA | 0.1-70 GHz | 30 dB Gain | 6.0 dB NF

Key Features










- Ultra-Wideband Coverage
- High gain low-noise amplifier
- Low Noise Figure
- Compact & Rugged Design

Applications

- RF receiver front-end
- Microwave communication systems
- Radar systems
- Satellite communication
- RF test and measurement

Electrical Specifications				
Parameter	Min.	Typ.	Max.	Unit
Frequency Range	0.1	-	70	GHz
Gain	-	30	-	dB
Gain Flatness	-	±2.5	-	dB
Input VSWR	-	1.8	2.6	-
Output VSWR	-	1.8	2.6	-
Output P1dB	-	15	-	dBm
Output Psat	-	16	-	dBm
Spurious	-	-60	-	dBc
OIP3	-	24	-	dBm
Noise Figure	-	6.0	-	dB
Input Max Power(no damage)	-	-	0	dBm
Supply Voltage	-	+12	-	V
Supply Current	-	600	-	mA
Impedance	50			Ω
Environmental Specifications				
Operating Temperature	-25°C to +85°C			
Storage Temperature	-55°C to +125°C			
* Heat Sink required during operation				
Mechanical Specifications				
Connectors	1.85 mm Female			
Material	Aluminium / Gold Plated			
Weight	36.9 g			
Dimensions ¹	30.5×30.5×12.7 mm [1.20×1.20×0.50 in]			

Outline Drawing (Units: mm/[inch], Tolerance: ±0.2 mm)

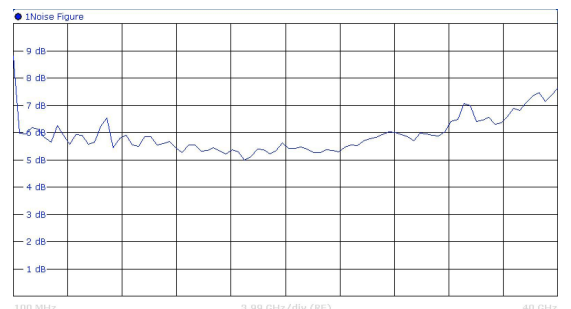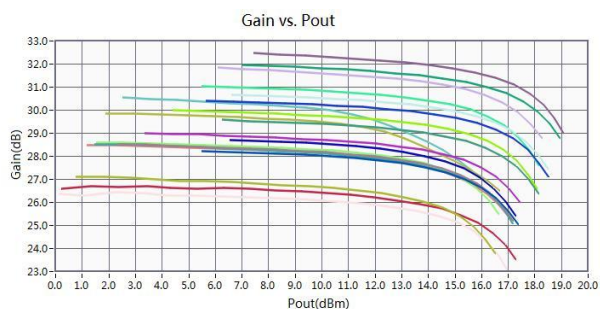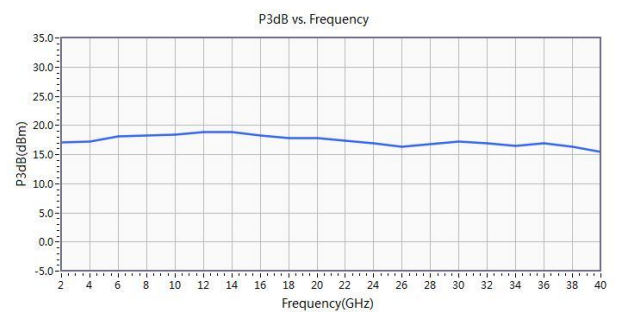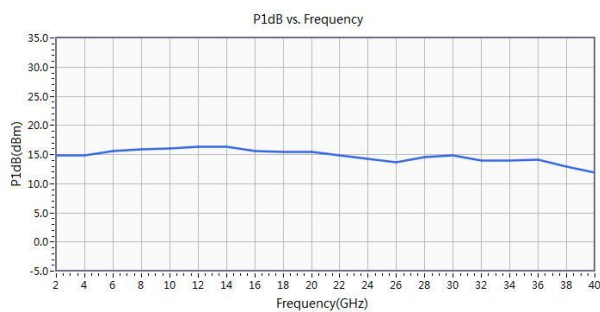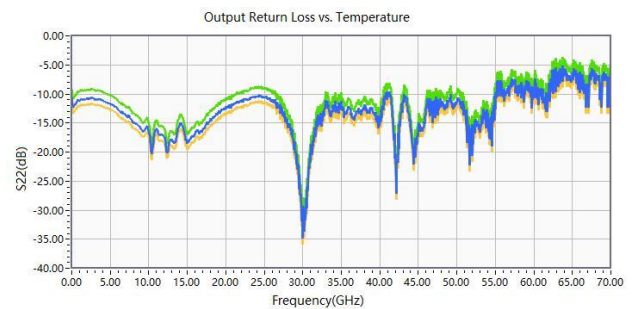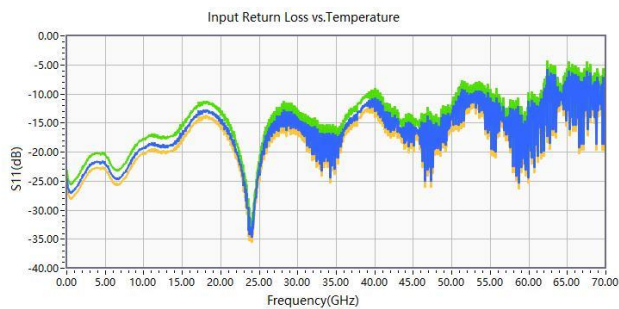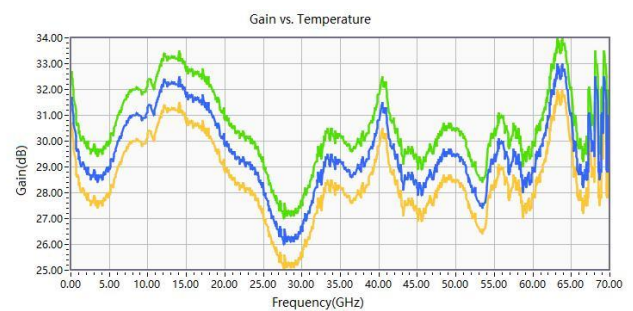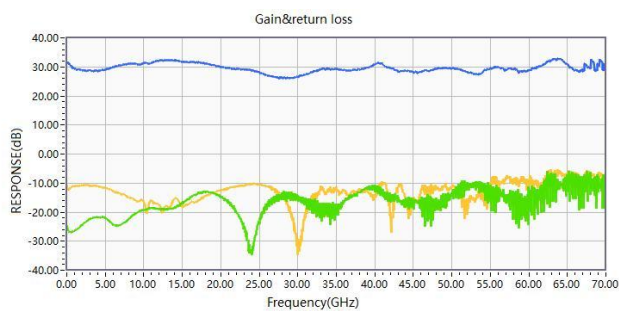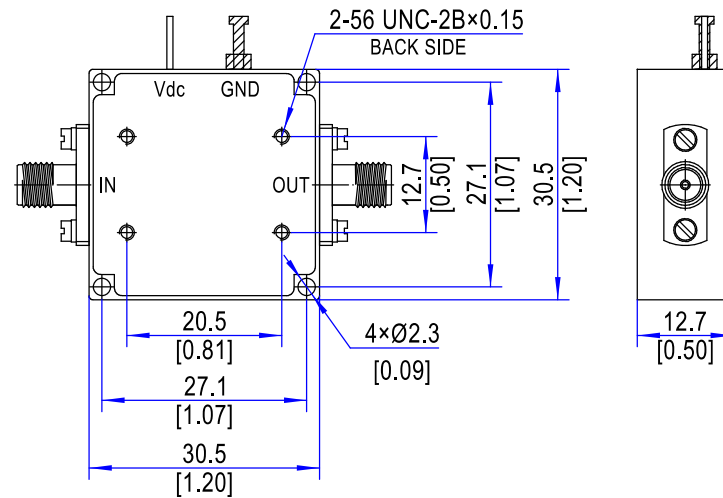

Note 1: Excluding Connectors