

# YSLL-520L

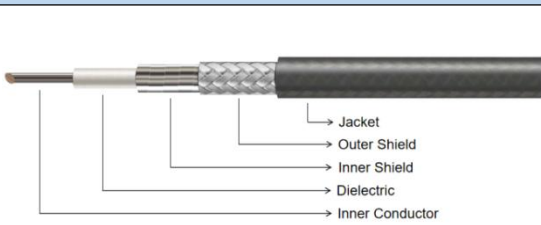
26.5 GHz, φ5.20 mm Low-Loss RF Cable Assembly

## Key Features

- Low Insertion Loss
- High Power Handling
- Low PIM (-155 dBc)
- Excellent RF Performance
- High Reliability

## Applications

- Aerospace & Avionics
- Electronic Warfare Systems
- Wireless Base Station Interconnects
- RF & Microwave Testing
- High-Power RF Systems

Cable Construction									
				Cable Type	Dia.(mm)	Material			
				Inner Conductor	φ1.29	Silver plated Copper			
				Dielectric	φ3.85	Low Density PTFE			
				Inner Shield	φ4.05	Silver Plated Copper Strip			
				Outer Shield	φ4.62	Silver Plated Copper Braid			
				Jacket	φ5.20	FEP			
Electrical Specifications					Mechanical Specifications				
Operating Freq.	26.5 GHz				Static Bending Radius	26 mm			
Cut-off Freq.	28 GHz				Dynamic Bending Radius	52 mm			
Impedance	50 Ω				Weight	66 g/m			
Velocity of Propagation	76%				Environmental Specifications				
Shielding Effectiveness	>90 dB				Operating Temperature	-55 to +165°C			
Dielectric Withstanding Voltage	1500 VDC								
Attenuation (dB/100 M, Typical at +25°C) & Power Handling (W, Typical at +40°C)									
Freq.(GHz)	1	2	3	6	8	10	12.4	18	26.5
Attenuation	25.0	35.6	44.0	63.2	73.7	83.0	93.1	114.0	141.1
Avg. Power	749	524	425	296	254	225	201	164	132
Typical Cable Attenuation Calculation Formula: $K1 \cdot \sqrt{F(\text{MHz})} + K2 \cdot F(\text{MHz})$ $K1=0.770610, K2=0.000591$									
Connectors Options									
Connectors	Freq.(Max)	VSWR (Max)			Connectors	Freq.(Max)	VSWR (Max)		
SMA (S)	27 GHz	1.25:1			N(N)	18 GHz	1.25:1		

## Cable Assemblies Naming Rule:

PN: Cable-Length(M)-Connector 1-Connector 2

Eg.: YSLL-520L-1M-SM-SF means YSLL-520L cable, L=1M, SMA(M)-SMA(F).

Add "R" for Right-Angle Connector, Add "H" for Bulkhead Connector (e.g., SMR, SFH).