

YSELLPS-790A

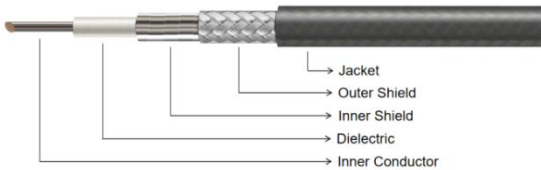
18 GHz, ϕ 7.90 mm Low-Loss Phase-Stable RF Cable Assembly

Key Features

- Outstanding Phase Stability vs. Temperature
- Ultra-Low Insertion Loss
- High Power Capability
- Excellent Low PIM Performance
- Lightweight and Rugged Construction

Applications

- Phased Array Radar
- Aerospace & Avionics Systems
- Electronic Warfare and Defense Systems
- Low-Loss Phase-Critical Applications

Cable Construction									
				Cable Type	Dia.(mm)	Material			
				Inner Conductor	Φ 2.30	Silver plated Copper			
				Dielectric	Φ 6.20	Low Density PTFE			
				Inner Shield	Φ 6.44	Silver Plated Copper Strip			
				Outer Shield	Φ 7.05	Silver Plated Copper Braid			
				Jacket	Φ 7.90	PFA			
Electrical Specifications					Mechanical Specifications				
Operating Freq.		18 GHz			Static Bending Radius		39 mm		
Cut-off Freq.		18 GHz			Dynamic Bending Radius		79 mm		
Impedance		50 Ω			Weight		130 g/m		
Velocity of Propagation		83%			Environmental Specifications				
Shielding Effectiveness		>90 dB			Operating Temperature		-55 to +165°C		
Dielectric Withstanding Voltage		3000 VDC							
Passive Intermodulation (PIM)		<-155 dBc							
Phase Stability vs. Temperature		<750 PPM @ -55 to +85°C							
Attenuation (dB/100 M, Typical at +25°C) & Power Handling (W, Typical at +40°C)									
Freq.(GHz)	1	2	3	6	8	10	12.4	16	18
Attenuation	14.7	21.0	26.0	37.3	43.4	48.8	54.8	62.8	67.0
Avg. Power	2303	1614	1309	912	783	696	620	541	507
Typical Cable Attenuation Calculation Formula: $K1*\sqrt{F}(\text{MHz}) + K2*F(\text{MHz})$ $K1=0.456300, K2=0.000320$									
Connectors Options									
Connectors	Freq.(Max)	VSWR (Max)		Connectors	Freq.(Max)	VSWR (Max)			
SMA (S)	27 GHz	1.25:1		N(N)	18 GHz	1.25:1			
TNC(T)	12 GHz	1.25:1		SC(G)	6 GHz	1.25:1			

Cable Assemblies Naming Rule:

PN: Cable-Length(M)-Connector 1-Connector 2

Eg.: YSELLPS-790A-1M-SM-SF means YSELLPS-790A cable, L=1M, SMA(M)-SMA(F).

Add "R" for Right-Angle Connector, Add "H" for Bulkhead Connector (e.g., SMR, SFH).