

YSPA31-1-18-S-HS

1-18 GHz Power Amplifier, 31 dB Psat, SMA

Key Features


- Broadband 1–18 GHz coverage
- 31 dBm Psat
- Low spurious emissions
- High reliability for continuous operation
- Compact module with +18 V supply

Applications

- Broadband communication systems
- Radar transmitter subsystems
- RF test and measurement
- Electronic warfare (EW)
- Microwave research laboratories

Electrical Specifications				
Parameter	Min.	Typ.	Max.	Unit
Frequency Range	1	-	18	GHz
Gain	30	-	-	dB
Gain Flatness	-	±2.0	±2.5	dB
Input VSWR	-	2.0	2.2	-
Output VSWR	-	2.0	2.2	-
Noise Figure	-	-	5.0	dB
Output P1dB	30	-	-	dBm
Output Psat	-	31	-	dBm
Spurious	-	-60	-	dBc
Input Max Power(no damage)	-	-	5	dBm
Supply Voltage	-	+18	-	V
Supply Current @ P1dB	-	1	-	A
Impedance	50			Ω
Environmental Specifications				
Operating Temperature	-25°C to +85°C			
Storage Temperature	-55°C to +125°C			
* Heat Sink required during operation				
Mechanical Specifications				
Connectors	SMA Female			
Material	Aluminium / Gold Painting			
Weight	710 g			
Dimensions ¹	100×140×52 mm [3.94×5.51×2.05 in]			

Outline Drawing (Units: mm/[inch], Tolerance: ±0.2 mm)

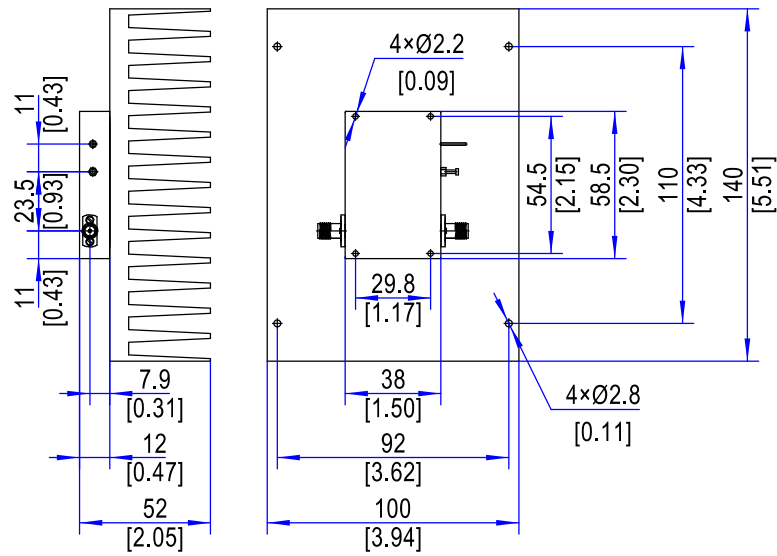

Note 1: Excluding Connectors