

YSPA40-1-8-S-HS

1-8 GHz Power Amplifier, 40 dB Psat, SMA

Key Features


- Broadband 1–8 GHz coverage
- 40 dBm Psat
- Low spurious emissions
- High reliability for continuous operation
- Compact module with +28 V supply

Applications

- Broadband communication systems
- Radar transmitter subsystems
- RF test and measurement
- Electronic warfare (EW)
- Microwave research laboratories

Electrical Specifications				
Parameter	Min.	Typ.	Max.	Unit
Frequency Range	1	-	8	GHz
Gain	40	-	-	dB
Gain Flatness	-	±2.5	-	dB
Input VSWR	-	1.5	2.0	-
Output P1dB	-	37	-	dBm
Output Psat	40	-	-	dBm
Spurious	-	-60	-	dBc
Input Max Power(no damage)	-	-	5	dBm
Supply Voltage	-	+28	-	V
Supply Current @ Pout=10 W	-	2	-	A
Impedance	50			Ω
Environmental Specifications				
Operating Temperature	-25°C to +85°C			
Storage Temperature	-55°C to +125°C			
* Heat Sink required during operation				
Mechanical Specifications				
Connectors	SMA Female			
Material	Aluminium			
Weight	-			
Dimensions ¹	100×200×56 mm [3.94×7.87×2.20 in]			

Outline Drawing (Units: mm/[inch], Tolerance: ±0.2 mm)

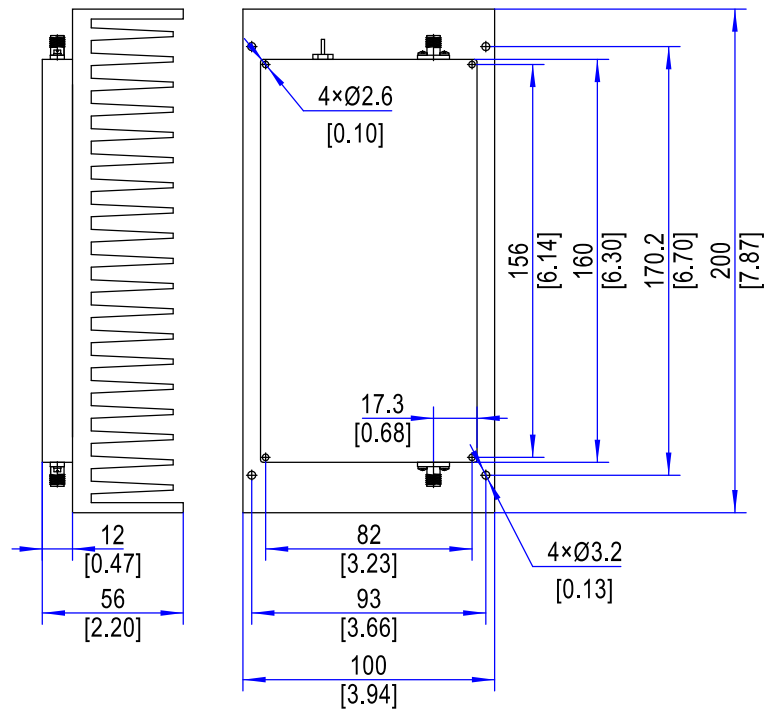

Note 1: Excluding Connectors