

YSRT20-26.5-S

Coaxial RF Termination, DC-26.5 GHz, 20 W, SMA Connector, 50 Ohm

Key Features

- 20 W avg. power @ 25°C
- DC to 26.5 GHz frequency range
- VSWR ≤ 1.30
- SMA female or male connector options


Applications

- Test & measurement systems
- Microwave & RF laboratory setups
- High-frequency communication systems
- Radar and aerospace electronics
- Component characterization and calibration

Electrical Specifications		
1	Nominal Impedance	50 Ω
2	Average Power ¹	20 W @ 25°C
3	Peak Power	200 W (pulse width: 5 μ s, duty cycle: 10%)
4	Frequency Range	DC-26.5 GHz
5	VSWR	≤ 1.30
Environmental Specifications		
1	Operating Temperature	-55°C to +125°C
Mechanical Specifications		
1	Connectors	SMA Female / Male
2	Body Material	Connector: Passivated Stainless Steel Heat Sink: Black Anodized Aluminum
3	Insulation	PEI
4	Inner Conductor	Gold plated brass/beryllium brass

Note 1: Power derates linearly to 2 W at +125°C.

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.2 mm)

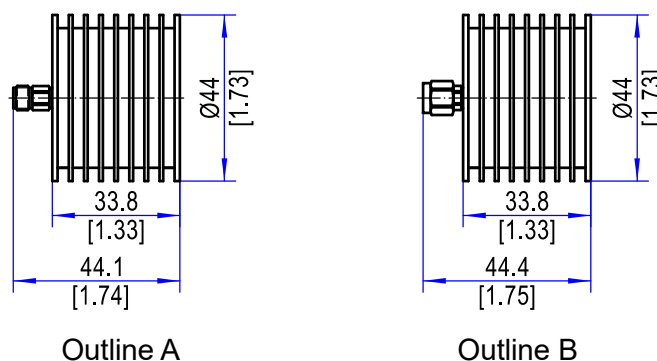

Ordering Information:

Model	Connector Type	Outline Drawing
YSRT20-26.5-S	SMA Female (default)	Outline A
YSRT20-26.5-SM	SMA Male	Outline B