

YSRT5-26.5-S

Coaxial RF Termination,DC-26.5 GHz,5 W,SMA Connector,50 Ohm

Key Features

- 5 W avg. power @ 25°C
- DC to 26.5 GHz frequency range
- VSWR ≤ 1.25
- SMA female or male connector options
- Passivated stainless steel body


Applications

- Test & measurement systems
- Microwave & RF laboratory setups
- High-frequency communication systems
- Radar and aerospace electronics
- Component characterization and calibration

Electrical Specifications		
1	Nominal Impedance	50 Ω
2	Average Power ¹	5 W @ 25°C
3	Peak Power	20 W (pulse width: 5 μ s,duty cycle: 2.5%)
4	Frequency Range	DC-26.5 GHz
5	VSWR	≤ 1.25
Environmental Specifications		
1	Operating Temperature	-55°C to +125°C
Mechanical Specifications		
1	Connectors	SMA Female / Male
2	Body Material	Connector: Passivated Stainless Steel Heat Sink: Black Anodized Aluminum
3	Insulation	PEI
4	Inner Conductor	Gold plated brass/beryllium brass

Note 1: Power derates linearly to 0.5 W at +125°C.Refer to the power derating curve for details.

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.2 mm)

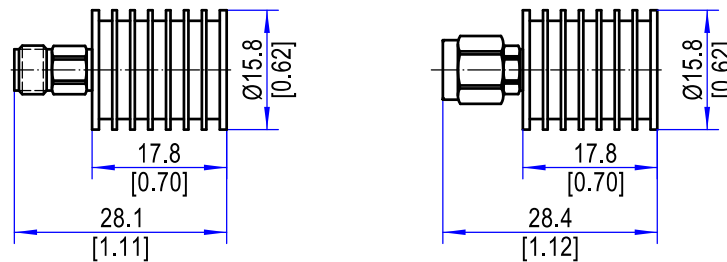

Outline A

Outline B

Ordering Information:

Model	Connector Type	Outline Drawing
YSRT5-26.5-S	SMA Female (default)	Outline A
YSRT5-26.5-SM	SMA Male	Outline B