

YS8RPC1500-6-6R5-BJ70

8-Way Radial Power Combiner, 1.5 kW, 6-6.5 GHz, BJ70

Key Features


- High-power handling capability
- Low combining loss
- Efficient multi-way power combining
- Compact radial design
- Custom high-power configurations

Applications

- High-power RF amplifiers
- Phased array radar
- Electronic warfare systems
- RF energy and plasma systems
- Broadcast transmitters

Electrical Specifications		
1	Frequency Range	6-6.5 GHz
2	Insertion Loss	≤ 0.75 dB(avg.)
3	Common Port VSWR	$\leq 1.40:1$
4	Amplitude Balance	$\leq \pm 0.3$ dB
5	Phase Balance	$\leq \pm 5^\circ$
6	Power Handling	1.5 kW(CW)
7	Impedance	50 Ω
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	BJ70, N-Type Female
2	Surface Finishing	Clear Conductive Oxide Finish
3	Dimensions ¹	$\Phi 130 \times 66.2$ mm / [$\Phi 4.06 \times 2.61$ in]

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.3 mm)

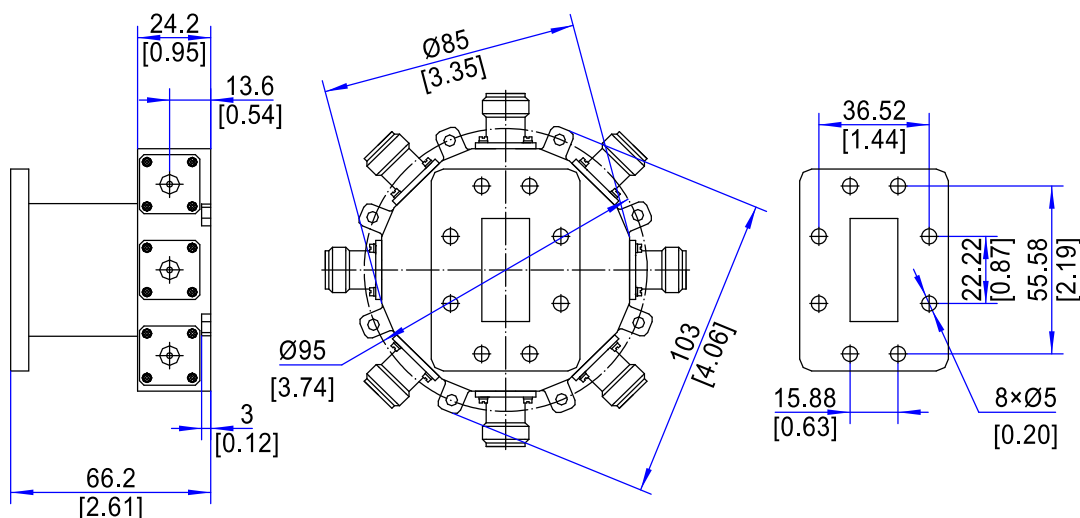

Note 1: Excluding Connectors