

YS10RPC1500-1-6-7

10-Way Radial Power Combiner, 1.5 kW, 1-6 GHz, 7/16 DIN

Key Features


- High-power handling capability
- Low combining loss
- Efficient multi-way power combining
- Compact radial design
- Custom high-power configurations

Applications

- High-power RF amplifiers
- Phased array radar
- Electronic warfare systems
- RF energy and plasma systems
- Broadcast transmitters

Electrical Specifications		
1	Frequency Range	1-6 GHz
2	Insertion Loss	≤ 1.0 dB(avg.)
3	Common Port VSWR	$\leq 1.60:1$
4	Amplitude Balance	$\leq \pm 0.5$ dB
5	Phase Balance	$\leq \pm 8^\circ$
6	Power Handling	1.5 kW(CW)
7	Impedance	50 Ω
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	7/16 DIN Female, SMA Femlae
2	Surface Finishing	Clear Conductive Oxide Finish
3	Dimensions ¹	155× Φ 52.5 mm / [6.54× Φ 2.07 in]

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.3 mm)

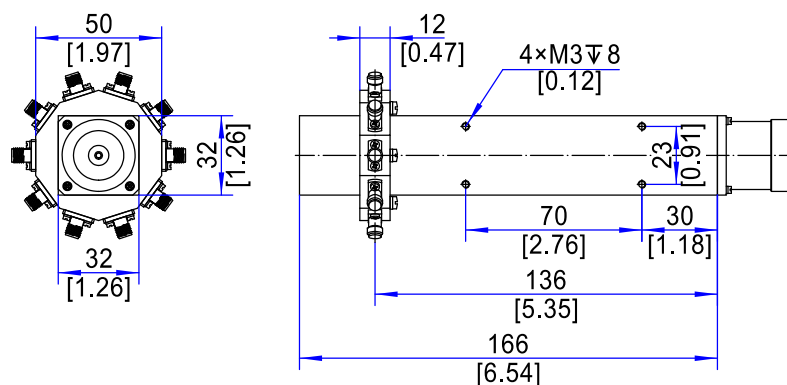

Note 1: Excluding Connectors