

YS2WPD20-10-26-K

2-Way Wilkinson Power Divider, 20 W, 10-26.5 GHz, 2.92 mm

Key Features


- 10-26.5 GHz Wideband Coverage
- Low Insertion Loss
- Excellent Amplitude & Phase Balance
- High Isolation (≥ 18 dB)
- 20 W Power Handling

Applications

- RF & Microwave Systems
- Test & Measurement
- Radar & EW Systems
- Communication Networks
- Signal Distribution

Electrical Specifications		
1	Frequency Range	10-26.5 GHz
2	Insertion Loss	≤ 1.0 dB
3	Input Port VSWR	$\leq 1.5:1$
4	Output Port VSWR	$\leq 1.5:1$
5	Isolation	≥ 18 dB
6	Amplitude Balance	$\leq \pm 0.3$ dB
7	Phase Balance	$\leq \pm 5^\circ$
8	Power Handling	20 W(CW); 3 KW(PK)
9	Impedance	50 Ω
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	2.92 mm Female
2	Dimensions ¹	29.2×26.9×12.7 mm / [1.15×1.06×0.50 in]

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.3 mm)

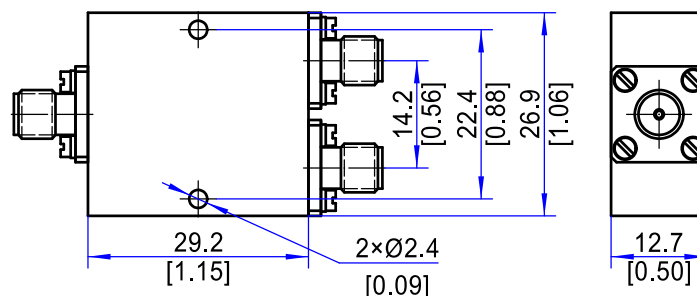

Note 1: Excluding Connectors