

## YS2WPD30-R5-8-S

2-Way Wilkinson Power Divider, 30 W, 0.5-8 GHz, SMA

### Key Features


- 0.5-8 GHz Wideband Coverage
- Low Insertion Loss
- Excellent Amplitude & Phase Balance
- High Isolation ( $\geq 18$  dB)
- 30 W Power Handling

### Applications

- RF & Microwave Systems
- Test & Measurement
- Radar & EW Systems
- Communication Networks
- Signal Distribution

Electrical Specifications		
1	Frequency Range	0.5-8 GHz
2	Insertion Loss	$\leq 1.5$ dB
3	Input Port VSWR	$\leq 1.45:1$ (Ambient) $\leq 1.55:1$ (High, Low Temperature)
4	Isolation	$\geq 18$ dB
5	Amplitude Balance	$\leq \pm 0.2$ dB
6	Phase Balance	$\leq \pm 3^\circ$
7	Power Handling	30 W(CW)
8	Impedance	50 $\Omega$
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	SMA Female
2	Surface Finishing	Putty filling and gray-white paint spraying
3	Dimensions <sup>1</sup>	120×23.4×12.7 mm / [4.72×0.92×0.50 in]

**Outline Drawing** (Units: mm/[inch], Tolerance:  $\pm 0.3$  mm)

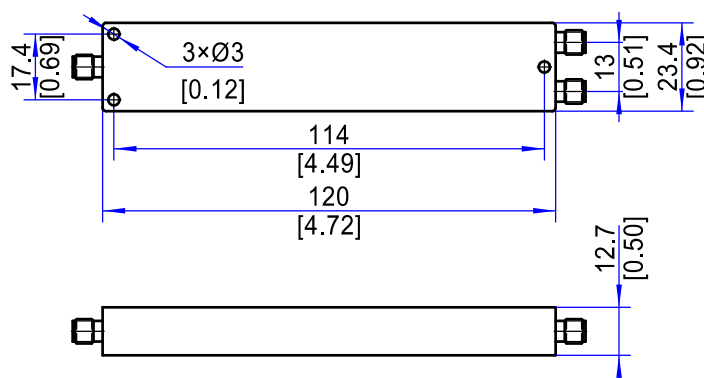

Note 1: Excluding Connectors