

YS3WPD20-2R2-2R6-S

3-Way Wilkinson Power Divider, 20 W, 2.2-2.6 GHz, SMA

Key Features


- 2.2-2.6 GHz Wideband Coverage
- Low Insertion Loss
- Excellent Amplitude & Phase Balance
- High Isolation (≥ 18 dB)
- 20 W Power Handling

Applications

- RF & Microwave Systems
- Test & Measurement
- Radar & EW Systems
- Communication Networks
- Signal Distribution

Electrical Specifications		
1	Frequency Range	2.2-2.6 GHz
2	Insertion Loss	≤ 0.5 dB
3	Input Port VSWR	$\leq 1.3:1$
4	Output Port VSWR	$\leq 1.3:1$
5	Isolation	≥ 18 dB
6	Amplitude Balance	$\leq \pm 0.3$ dB
7	Power Handling	20 W
8	Impedance	50 Ω
Environmental Specifications		
1	Operating Temperature	-40°C to +85°C
Mechanical Specifications		
1	Connectors	SMA Female
2	Surface Finishing	Putty filling and gray-white paint spraying
3	Dimensions ¹	41×52×10 mm / [1.61×2.05×0.39 in]

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.3 mm)

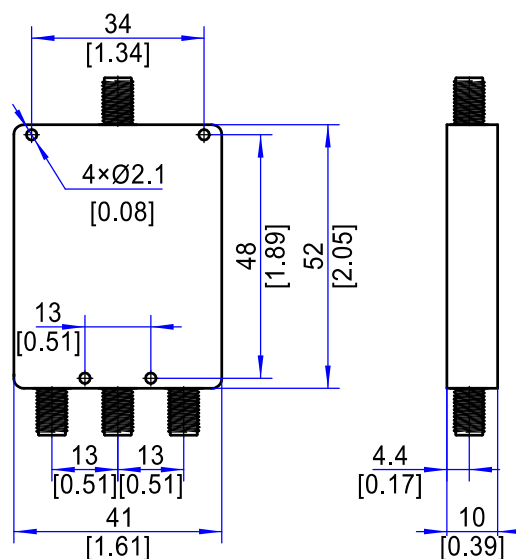

Note 1: Excluding Connectors