

YSDC50-2-8-6-S

Directional Coupler, 50 W, 2-8 GHz, 6 dB coupling, SMA

Key Features


- Broadband 2–8 GHz Coverage
- Stable 6 dB Coupling with Low Flatness
- Low Insertion Loss & High Directivity
- High Power Handling up to 50 W
- Rugged Design with SMA Interface

Applications

- RF & Microwave Test Systems
- Signal Monitoring & Power Sampling
- Communication Systems (L/S Band)
- Radar Subsystems & Integration
- Lab & Production Testing

Electrical Specifications		
1	Frequency Range	2-8 GHz
2	Coupling	6 ±1 dB
3	Coupling Flatness	≤ ±1.0 dB
4	VSWR	≤1.5:1
5	Insertion Loss	≤1.8 dB
6	Directivity	≥20 dB
7	Power	50 W
Environmental Specifications		
1	Operating Temperature	-55°C to +85°C
Mechanical Specifications		
1	Connectors	SMA Female
2	Surface Finishing	Natural Conductive Oxidation
3	Dimensions ¹	43×15×11 mm / [1.69×0.59×0.43 in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3 mm)

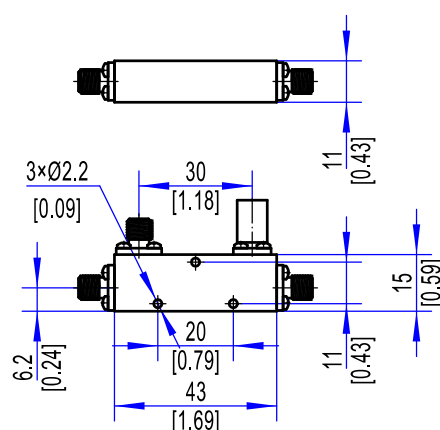

Note 1: Excluding Connector size